

12

EUROPEAN PATENT APPLICATION

Application number: 90304088.9

Int. Cl.⁵: H03L 7/22

Date of filing: 17.04.90

Priority: 17.04.89 US 339534

Date of publication of application:
 24.10.90 Bulletin 90/43

Designated Contracting States:
 DE FR GB IT NL

Applicant: RAYTHEON COMPANY
 141 Spring Street
 Lexington Massachusetts 02173(US)

Inventor: Waterman, Raymond C., Jr.
 21 Jefferson Road
 Westford, Massachusetts(US)
 Inventor: Chiesa, John A.
 34 Lucust Street
 Dracut, Massachusetts(US)
 Inventor: Galani, Zvi
 3 Birchwood Drive
 Bedford, Massachusetts(US)

Representative: Jackson, David Spence et al
 REDDIE & GROSE 16, Theobalds Road
 London, WC1X 8PL(GB)

Digital frequency synthesizer.

A multiple feedback loop frequency synthesizer (100) is fed by reference frequency signals (f_{R1}, f_{R2}), the frequency of such reference frequency signals being greater than the desired frequency separation provided by the synthesizer. With such arrangement, because the bandwidth of each of the feedback loops (102, 104) must be less than the frequency of the reference frequency signal fed to such loop, achievement of frequency separation less than the frequency of either one of the reference frequencies enables each of the feedback loops (102, 104) to have increased bandwidth and hence reduced frequency switching times and increased noise suppression. A single frequency offset generator (114) supplies an offset frequency (f_{OS1}) to a mixer (112) in one loop (104) in which the mixer output is divided by N for comparison in a phase/frequency detector (126) with one reference frequency (f_{R2}). The output (f_{OS2}) of this loop (104) is used as the offset in the other, similar loop (102).

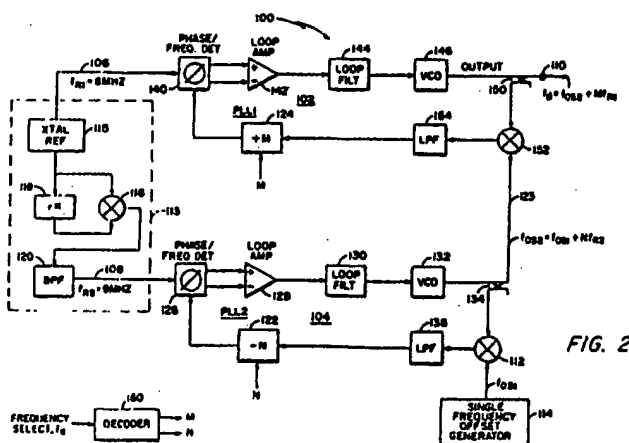


FIG. 2

DIGITAL FREQUENCY SYNTHESIZER

Background of the Invention

This invention relates generally to digital frequency synthesizers and more particularly to indirect digital frequency synthesizers adapted to produce an output signal having a selected frequency within a band of frequencies with predetermined frequency separation.

As is known in the art, digital frequency synthesizers generally fall into two categories: direct frequency synthesizers and indirect frequency synthesizers. Direct synthesizers are typically open-loop configurations using frequency multipliers, frequency dividers, mixers and switches. While offering the advantage of fast frequency switching and generation of closely spaced frequencies, they are relatively hardware intensive and have a tendency of generating an excessive number of spurious signals. Indirect frequency synthesizers on the other hand are feedback loop configurations adapted to produce an output signal having a selected frequency within a spectrum of frequencies with a predetermined frequency separation. In one type of indirect synthesizer, the feedback loop translates a fixed offset frequency f_{os} , which is near one end of the operating band, by an amount (f_T) required to produce an output signal having the desired frequency, f_d , i.e. $f_d = f_{os} \pm f_T$. More particularly, a reference frequency signal having a reference frequency f_R is compared with a feedback signal, derived from the output signal, having a frequency related to the actual amount of frequency translation (f_T) provided to produce the output signal. As a result of this comparison, an error signal is produced which drives a voltage controlled oscillator (VCO) such that, in the steady state, the actual amount of frequency translation provided to the output signal (f_T) is equal to the required amount of frequency translation (f_T) to produce the desired output frequency, f_d . To provide rapid, accurate response a phase-lock loop is used for the feedback loop. In such phase-lock loop the feedback signal is fed to a programmable frequency divider prior to being compared with the frequency of the reference frequency signal. The division ratio N of the frequency divider is selected in response to a signal representative of the desired frequency, so that N is the ratio of the required translation frequency f_T to the reference frequency f_R i.e. $N = f_T/f_R$. Thus, in the steady state, the error signal produced by a phase detector drives the VCO so that in the steady state $f_d = f_{os} \pm Nf_R$ depending on whether the offset frequency is near the lower, or upper, end of the frequency band, respectively. More particularly, the offset frequency signal is mixed with the output signal of the phase-lock loop to produce, in the steady state, the feedback signal having the translation frequency f_T . The frequency of the feedback signal is divided by the integer N , selected in response to the frequency select input signal, such that $N = f_T/f_R$. Therefore, if the desired output frequency is f_d , and assuming the offset frequency f_{os} is below the lower end of the spectrum, $N = (f_d - f_{os})/f_R$. It follows that since N is an integer the minimum frequency separation attainable with such synthesizer is f_R , the frequency of the reference frequency signal. An advantage of the indirect frequency synthesizer of this type is that spurious signal levels are reduced because of the low pass filtering action of the feedback loop. A disadvantage, however, is its longer frequency switching time compared with the switching time of a direct frequency synthesizer.

While such an indirect digital frequency synthesizer may be adequate in some applications it requires that the highest operating frequency of the programmable frequency divider generally be equal to, or greater than, the highest translation frequency f_T . However, because commercially available digital frequency dividers have a fixed highest operating frequency, such synthesizer may, therefore, be limited in its application. One type of indirect digital synthesizer which reduces the required highest operating frequency of the divider by placing the offset frequency near the middle of the desired frequency range f_d is described in copending European application No. 89311439.7 assigned to the same assignee as the present invention.

In still another type of indirect digital frequency synthesizer, a second phase-lock loop is provided for use in applications requiring closely spaced frequencies without high frequency division ratios. More specifically, a second phase-lock loop is used to synthesize a second offset frequency f_{os2} used by the first, or main phase lock loop. Such arrangement is shown in Fig. 1, where an indirect digital frequency synthesizer 10 is shown here to produce an output signal having a frequency within a band of 400 frequencies with a 1 MHz frequency separation. Thus, here synthesizer 10 is shown to include a first phase-lock loop 12. The first phase lock loop 12 (PLL1) is fed by a first reference frequency signal having a frequency f_{R1} , here 10 MHz, provided by a crystal oscillator 14 and the second offset frequency signal on line 16 having a frequency f_{os2} synthesized in a manner to be described hereinafter by a second phase-lock loop 18. The first phase-lock loop 12 includes a phase/frequency detector 20, the output of which, after being amplified by loop amplifier 22 and filtered by filter 24, drives a voltage controlled oscillator (VCO) 26.

The phases/frequency detector 20 is here a model MC12040 sold by Motorola, Phoenix, Arizona and includes appropriate filtering at its output to produce a signal representative of the phase between two signals fed thereto. when a first one of the fed signals leads a second one of the fed signals, a first one of a pair of outputs of the detector 20 produces a voltage proportional to the phase between the two fed signals while the second one of the pair of outputs is zero, whereas when the first one of the fed signals lags the second one of the fed signals the first one of the outputs is zero, and the second one of the pair of outputs produces a voltage proportional to the phase between the two fed signals. The VCO 26 produces an output signal at output port 28 having, in the steady state, the desired frequency f_d . A portion of the output signal is fed, via a directional coupler 30, to a mixer 32. Also fed to mixer 32 is the second offset frequency signal synthesized by the second phase-lock loop 18. The resulting beat frequency, feedback signal is passed through low pass filter 34 to a programmable frequency divider 36. The output of divider 36 is fed to the phase/frequency detector 20, as shown. Likewise the second phase-lock loop 18 (PLL2) is fed by: a second reference frequency signal, having a frequency f_{R2} , here a 1MHZ, produced by passing the 10MHZ reference input frequency signal produced by crystal oscillator 14 through a frequency divider 40, here a 10:1 frequency divider; and, a first offset frequency generator 42. The first offset frequency generator 42 produces a signal having an output frequency f_{os1} either above the upper, or below the lower end of the band of frequencies being synthesized (here below the lower end of the band). A portion of the signal synthesized by the second phase-lock loop 18 (for use as the second offset frequency of the first phase-lock loop 12) is coupled to a second mixer 44 via a directional coupler 46 along with the first offset frequency signal produced by generator 42. Thus the beat frequency feedback signal produced by the second mixer 44 and fed through low pass filter 48 is coupled to a second programmable frequency divider 50. The signal produced by the second programmable frequency divider 50 is fed to the phase/frequency detector 52 along with the 1MHZ second reference frequency signal provided by the 10:1 frequency divider 40. The signal produced by the second phase/frequency detector 52 is fed to a second VCO 54 via loop amplifier 56 and filter 58. The signal produced by this second VCO 54 is fed to the first mixer 32, via line 16, and to the second mixer 44 via directional coupler 46. Completing the synthesizer 10 is a decoder 60, here including a conventional read only memory (ROM) which, in response to a digital word representative of the desired frequency f_d to be synthesized, produces digital commands representative of the integer division ratios M and N for the first programmable frequency divider 36 and the second programmable frequency divider 50, respectively. It follows then that, in the steady state, the frequency of the second offset frequency signal produced by the second phase-lock loop 18 on line 16 will be $f_{os2} = f_{os1} + Nf_{R2}$. Therefore, in the steady state, the frequency of the output signal at output port 28 will be $f_d = f_{os2} + Mf_{R1} = f_{os1} + Nf_{R2} + Mf_{R1} = f_{os1} + (N)MHZ + (10M)MHZ$. The data stored in the decoder 60 to generate the desired frequency f_d is presented in Table I below:

TABLE I

$$f_d = (f_T + f_{os1}) = f_{os1} + (10M + N)\text{MHZ}$$

		$f_g(\text{MHz})$																			
		0		1		2		3		4		5		6		7		8		9	
		M	N	M	N	M	N	M	N	M	N	M	N	M	N	M	N	M	N	M	N
10	$f_{os1} + 10$	-	-	1	1	1	2	1	3	1	4	1	5	1	6	1	7	1	8	1	9
	$+20$	1	10	2	"	2	"	2	"	2	"	2	"	2	"	2	"	2	"	2	"
	$+30$	2	10	3	"	3	"	3	"	3	"	3	"	3	"	3	"	3	"	3	"
	$+40$	3	"	4	"	4	"	4	"	4	"	4	"	4	"	4	"	4	"	4	"
	$+50$	4	"	5	"	5	"	5	"	5	"	5	"	5	"	5	"	5	"	5	"
	$+60$	5	"	6	"	6	"	6	"	6	"	6	"	6	"	6	"	6	"	6	"
	$+70$	6	"	7	"	7	"	7	"	7	"	7	"	7	"	7	"	7	"	7	"
	$+80$	7	"	8	"	8	"	8	"	8	"	8	"	8	"	8	"	8	"	8	"
	$+90$	8	"	9	"	9	"	9	"	9	"	9	"	9	"	9	"	9	"	9	"
	$+100$	9	"	10	"	10	"	10	"	10	"	10	"	10	"	10	"	10	"	10	"
15	$+110$	10	"	11	"	11	"	11	"	11	"	11	"	11	"	11	"	11	"	11	"
	$+120$	11	"	12	"	12	"	12	"	12	"	12	"	12	"	12	"	12	"	12	"
	$+130$	12	"	13	"	13	"	13	"	13	"	13	"	13	"	13	"	13	"	13	"
	$+140$	13	"	14	"	14	"	14	"	14	"	14	"	14	"	14	"	14	"	14	"
	$+150$	14	"	15	"	15	"	15	"	15	"	15	"	15	"	15	"	15	"	15	"
	$+160$	15	"	16	"	16	"	16	"	16	"	16	"	16	"	16	"	16	"	16	"
	$+170$	16	"	17	"	17	"	17	"	17	"	17	"	17	"	17	"	17	"	17	"
	$+180$	17	"	18	"	18	"	18	"	18	"	18	"	18	"	18	"	18	"	18	"
	$+190$	18	"	19	"	19	"	19	"	19	"	19	"	19	"	19	"	19	"	19	"
	$+200$	19	"	20	"	20	"	20	"	20	"	20	"	20	"	20	"	20	"	20	"
20	$+210$	20	"	21	"	21	"	21	"	21	"	21	"	21	6	21	"	21	"	21	"
	$+220$	21	"	22	"	22	"	22	"	22	"	22	"	22	"	22	"	22	"	22	"
	$f_{os1} + 230$	22	10	23	1	23	2	23	3	23	4	23	5	23	6	23	7	23	8	23	9
	$+240$	23	"	24	"	24	"	24	"	24	"	24	"	24	"	24	"	24	"	24	"
	$+250$	24	"	25	"	25	"	25	"	25	"	25	"	25	"	25	"	25	"	25	"
	$+260$	25	"	26	"	26	"	26	"	26	"	26	"	26	"	26	"	26	"	26	"
	$+270$	26	"	27	"	27	"	27	"	27	"	27	"	27	"	27	"	27	"	27	"
	$+280$	27	"	28	"	28	"	28	"	28	"	28	"	28	"	28	"	28	"	28	"
	$+290$	28	"	29	"	29	"	29	"	29	"	29	"	29	"	29	"	29	"	29	"
	$+300$	29	"	30	"	30	"	30	"	30	"	30	"	30	"	30	"	30	"	30	"
25	$+310$	30	"	31	"	31	"	31	"	31	"	31	"	31	"	31	"	31	"	31	"
	$+320$	31	"	32	"	32	"	32	"	32	"	32	"	32	"	32	"	32	"	32	"
	$+330$	32	"	33	"	33	"	33	"	33	"	33	"	33	"	33	"	33	"	33	"
	$+340$	33	"	34	"	34	"	34	"	34	"	34	"	34	"	34	"	34	"	34	"
	$+350$	34	"	35	"	35	"	35	"	35	"	35	"	35	"	35	"	35	"	35	"
	$+360$	35	"	36	"	36	"	36	"	36	"	36	"	36	"	36	"	36	"	36	"
	$+370$	36	"	37	"	37	"	37	"	37	"	37	"	37	"	37	"	37	"	37	"
	$+380$	37	"	38	"	38	"	38	"	38	"	38	"	38	"	38	"	38	"	38	"
	$+390$	38	"	39	"	39	2	39	3	39	4	39	5	39	6	39	7	39	8	39	9
	$f_{os1} + 400$	39	10	40	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

50

Thus, for example, if the desired frequency, f_d , to be synthesized is $f_{os1} + 235\text{MHZ}$ from Table I, $M = 23$ and $N = 5$. From Fig. 1, it follows that the frequency of the signal fed to the second programmable frequency divider 50, in the steady state, will be 5 MHz and the VCO 54 will produce a signal having a frequency $f_{os2} = f_{os1} + Nf_{R2} = f_{os1} + 5\text{ MHz}$. This signal is fed via line 18 to the first phase-lock loop 12 and hence the frequency of the signal fed to the first programmable frequency divider 36 will be, in the steady state, $Mf_{R1} = 230\text{MHZ}$ with the result that the VCO 28 will produce an output signal having the desired frequency $f_{os1} + 235\text{MHZ}$. Thus the pair of phase-lock loops 12, 18 translate the first offset

frequency f_{os1} an amount $f_T = Mf_{R1} + Nf_{R2} = 235\text{MHz}$. Here, the bandwidth of the translation frequency f_T is 400MHz. Further the frequency separation is thus equal to the frequency of the second reference frequency f_{R2} , here the 1 MHz signal fed to the second phase/frequency detector 52 of the second phase-lock loop 18. As is also known, the bandwidth of a phase-lock loop must be substantially smaller than the frequency of the reference frequency signal fed to such loop so that the loop provides adequate attenuation to the reference frequency signal leaking into the loop. Therefore, smaller frequency separation leads to narrower bandwidth phase-lock loops with the concomitant effect of increasing frequency switching time.

Summary of the Invention

With this background of the invention in mind, it is therefore an object of this invention to provide an improved digital frequency synthesizer.

It is another object of this invention to provide an improved indirect digital frequency synthesizer adapted to produce a signal having a selected one of a plurality of relatively closely spaced frequencies and having a relatively fast frequency switching time.

These and other objects of the invention are attained generally by providing a multiple feedback loop frequency synthesizer fed by reference frequency signals, the frequency of such reference frequency signals being greater than the desired frequency separation provided by the synthesizer. With such arrangement, because the bandwidth of each of the feedback loops must be less than the frequency of the reference frequency signal fed to such loop, achievement of frequency separation less than the frequency of either one of the reference frequencies enables each of the feedback loops to have increased bandwidth and hence reduced frequency switching times and increased noise suppression.

Brief Description of the Drawing

The foregoing features of this invention, as well as the invention itself, may be more fully understood from the following detailed description read together with the accompanying drawings, in which:

Fig. 1 is a block diagram of an indirect digital frequency synthesizer according to the prior art;

Fig. 2 is a block diagram of an indirect digital frequency synthesizer according to the invention; and

Fig. 3 is a block diagram of an indirect digital frequency synthesizer according to an alternative embodiment of the invention.

Description of the Preferred Embodiments

Referring now to Fig. 2 an indirect digital frequency synthesizer 100 is shown to include a pair of feedback loops, here phase-lock loops 102, 104, (PLL1, PLL2), fed by a pair of reference frequency signals having frequencies f_{R1} and f_{R2} , respectively via lines 106, 108, respectively. The digital frequency synthesizer 100 is adapted to produce an output signal at output port 110 having a selected one of a plurality of closely spaced frequencies within a predetermined band of frequencies; the spacing of such frequencies being less than the frequencies f_{R1} , f_{R2} of the pair of reference frequency signals. Here the predetermined band of frequencies extends from a frequency f_{os1} to $f_{os1} + f_T$ and the separation in the frequencies in the band is Δf . Thus f_{R1} is greater than Δf and f_{R2} is greater than Δf . With such arrangement, therefore, even though the phase-lock loops 102, 104 must have bandwidths less than the reference frequencies f_{R1} , f_{R2} , respectively, fed to such loops in order to provide adequate attenuation to the reference frequency signals leaking into such loops, the frequency separation is here less than the frequency of either one of the pair of reference frequency signals, and the bandwidths of the loops are therefore sufficiently large to provide rapid frequency switching. For example, here the first reference frequency signal fed to the first phase-lock loop 102 via line 106 is 8MHz, and the frequency of the second reference frequency signal fed to the second phase-lock loop 104 via line 108 is 9MHz while the frequency separation provided by synthesizer 100 is 1MHz. Thus, here the bandwidth of the second phase-lock loop 104 (Fig. 2) would generally be 9 times greater than the bandwidth of the prior art second phase-lock loop 18, (Fig. 1) and hence the synthesizer 100 (Fig. 2) has faster frequency switching as compared with the

prior art synthesizer 10 (Fig. 1) even though both synthesizers 10, 100 provide the same 1MHz frequency separation.

Referring now in more detail to the second phase-lock loop 104 (Fig. 2), such loop 104 includes a mixer 112 fed by an offset frequency signal produced by a frequency generator 114. The frequency f_{os1} of the offset frequency signal is either above the upper, or below the lower end of the band of frequencies synthesizable by loop 104, here such frequency is below the lower end of the band. The first and second reference frequency signals produced on lines 106, 108 are generated by a reference frequency generator 113. More particularly, here, for example, the first reference frequency signal, having the frequency f_{R1} , is derived directly from a crystal oscillator 115. The second reference frequency signal having the frequency f_{R2} is derived indirectly by passing a portion of the first reference frequency signal produced by such oscillator 115, (having the frequency f_{R1}) to both a mixer 116 and a frequency divider 118. The output of the divider 118 is also fed to the mixer 116. The frequency of the signal produced by feeding the output of mixer 116 through a band-pass filter 120 (here a filter which passes the upper sideband frequency) is thus $f_{R1} + (f_{R1}/K) = f_{R2}$, where K is the division integer of the divider 118. If $K = f_{R1}/(1\text{MHz})$, $f_{R2} - f_{R1} =$ the desired frequency spacing, here 1MHz. Thus, since here f_{R1} is 8MHz, $\Delta f = 1\text{MHz}$, $K = 8$ and $f_{R2} = 9\text{MHz}$. Thus, it is noted that the reference frequency signals fed to both loops 102 and 104 are greater than the 1 MHz frequency separation. The second reference frequency signal, having the frequency f_{R2} , here 9MHz, is fed to the second phase-lock loop 104 and the 8MHz first reference frequency signal produced by the crystal oscillator 115 is fed as the first reference frequency signal for the first phase-lock loop 102. The function of the second phase lock loop 104 is to translate the frequency f_{os1} of the offset frequency signal by N f_{R2} , where N is the division ratio of the programmable frequency divider 122 (that is, here translate the frequency of the offset frequency f_{os1} higher by Nf_{R2}) while the function of the first phase-lock loop 102 is to translate the frequency, f_{os2} , of the output of the second phase-lock loop 104 (and fed to the first phase-lock loop 102 via line 123) an amount Mf_{R1} , where M is the division ratio of the programmable frequency divider 124, (that is, here also translate such frequency f_{os2} higher by Mf_{R1}). The result is that the frequency of the signal produced at output 110, in the steady state, will be $f_d = f_{os1} + f_T$ where $f_T = 9N + 8M$.

The second feedback loop, here phase lock loop 104, includes a phase/frequency detector 126 for comparing the phase of the 9MHz second reference frequency signal with the phase of a 9MHz signal produced by programmable divider 122. The output of the phase/frequency detector 126 is fed through a loop amplifier 128 and filter 130 to provide the control signal for a voltage controlled oscillator (VCO) 132. A portion of the signal produced at the output of VCO 132 is fed, via directional coupler 134, to mixer 112 and to mixer 152 of the first phase-lock loop 102. The beat frequency signal produced by passing the output of mixer 112 through low pass filter 136 is fed as an input to the programmable frequency divider 122. It follows then that, in the steady state, the second phase-lock loop 104 will track the frequency of the signal produced by the VCO 132 to maintain it at a frequency $f_{os1} + (9N)\text{MHz}$, where, as mentioned above, N is the division ratio of the programmable frequency divider 122.

Likewise the first phase-lock loop 102 includes a phase/frequency detector 140 fed, via line 106, by the first reference frequency signal produced by the crystal oscillator 115 and by the 8MHz signal produced by the programmable frequency divider 124. The output of the phase/frequency detector 140 is fed, via amplifier 142 and filter 144, to voltage controlled oscillator (VCO) 146. A portion of the signal produced at the output of VCO 146 is fed, via directional coupler 150, to mixer 152 and to output port 110. Also fed to mixer 152, via line 123, is a portion of the signal produced by VCO 132. Thus, the beat frequency signal produced by passing the output of mixer 152 through low pass filter 154 is fed to the input of the programmable frequency divider 124 so that, in the steady state, the phase-lock, loop 102 maintains the frequency of the signal produced by the VCO 146 at $f_d = f_{os1} + f_T$ where $f_T = (8M)\text{MHz} + (9N)\text{MHz}$, and where M is the division ratio of the programmable frequency divider 124.

Completing the frequency synthesizer 100 is a decoder 160, here including a conventional read only memory, programmed to produce digital commands representative of the integer division ratios M and N in response to an applied digital word representative of the desired frequency f_d . The data stored in decoder 160 to generate the desired frequency f_d is presented in Table II below:

TABLE II

$$f_d = f_{os1} + (8M + 9N)\text{MHZ}$$

		$f_d(\text{MHZ})$																			
		0		1		2		3		4		5		6		7		8		9	
		M	N	M	N	M	N	M	N	M	N	M	N	M	N	M	N	M	N	M	N
10	$f_{os1} + 70$							8	1	7	2	6	3	5	4						
	80	1	8	8	1	8	2	7	3	6	4	5	5	4	6	3	7	2	8	1	9
	90	9	2	8	3	7	4	6	5	5	6	4	7	3	8	2	9	1	10	9	3
	100	8	4	7	5	6	6	5	7	4	8	3	9	2	10	10	3	9	4	8	5
	110	7	6	6	7	5	8	4	9	3	10	2	11	10	4	9	5	8	6	7	7
15	120	6	8	5	9	4	10	3	11	11	4	10	5	9	6	8	7	7	8	6	9
	130	5	10	4	11	3	12	11	5	10	6	9	7	8	8	7	9	6	10	5	11
	140	4	12	12	5	11	6	10	7	9	8	8	9	7	10	6	11	5	12	4	13
	150	12	6	11	7	10	8	9	9	8	10	7	11	6	12	5	13	13	6	12	7
	160	11	8	10	9	9	10	8	11	7	12	6	13	5	14	13	7	12	8	11	9
20	170	10	10	9	11	8	12	7	13	6	14	14	7	13	8	12	9	11	10	10	11
	180	9	12	8	13	7	14	6	15	14	8	13	9	12	10	11	11	10	12	9	13
	190	8	14	7	15	15	8	14	9	13	10	12	11	11	12	10	13	9	14	8	15
	200	7	16	15	9	14	10	13	11	12	12	11	13	10	14	9	15	8	18	16	9
	210	15	10	14	11	13	12	12	13	11	14	10	15	9	16	8	17	16	10	15	11
25	220	14	12	13	13	12	14	11	15	10	16	9	17	17	10	16	11	15	12	14	13
	230	13	14	12	15	11	16	10	17	9	18	17	11	16	12	15	13	14	14	13	15
	240	12	16	11	17	10	18	18	11	17	12	16	13	15	14	14	15	13	16	12	17
	250	11	18	10	19	18	12	17	13	16	14	15	15	14	16	13	17	12	18	11	19
	260	19	12	18	13	17	14	16	15	15	16	14	17	13	18	12	19	11	20	19	13
30	270	18	14	17	15	16	16	15	17	14	18	13	19	12	20	20	13	19	14	18	15
	280	17	16	16	17	15	18	14	19	13	20	12	21	20	14	19	15	18	16	17	17
	290	16	18	15	19	14	20	13	21	21	14	20	15	19	16	18	17	17	18	16	19
	300	15	20	14	21	13	22	21	15	20	15	19	17	18	18	17	19	16	20	15	21
	310	14	22	22	15	21	18	20	17	19	18	18	19	17	20	16	21	15	22	14	23
35	320	22	16	21	17	20	18	19	19	18	20	17	21	16	22	15	23	23	16	22	17
	330	21	18	20	19	19	20	18	21	17	22	16	23	15	24	23	17	22	18	21	19
	340	20	20	19	21	18	22	17	23	16	24	24	17	23	18	22	19	21	20	20	21
	350	19	22	18	23	17	24	16	25	24	18	23	18	22	20	21	21	20	22	19	23
	360	18	24	17	25	25	18	24	19	23	20	22	21	21	22	20	23	19	24	18	25
40	370	17	26	25	18	24	20	23	21	22	22	21	23	20	24	19	25	18	26	26	19
	380	25	20	24	21	23	22	22	23	21	24	20	25	19	26	18	27	26	20	25	21
	390	24	22	23	23	22	24	21	25	20	26	19	27	27	20	26	21	25	22	24	23
	400	23	24	22	25	21	26	20	27	19	28	27	21	26	22	25	23	24	24	23	25
	410	22	26	21	27	20	28	28	21	27	22	26	23	25	24	24	25	23	26	22	27
45	420	21	28	20	29	28	22	27	23	26	24	25	25	24	26	23	27	22	28	21	29
	430	29	22	28	23	27	24	26	25	25	26	24	27	23	28	22	29	21	30	29	23
	440	28	24	27	25	26	26	25	27	24	28	23	29	22	30	30	23	29	24	28	25
	450	27	26	26	27	25	28	24	29	23	30	22	31	30	24	29	25	28	26	27	27
	460	26	28	25	29	24	30	23	31	31	24	30	25	29	26	28	27	27	28	26	29
	$f_{os1} + 470$	25	30	24	31	23	32														

It is first noted that not all of the first 73 translation frequencies can be synthesized. A solution to the problem is to move the offset frequency, f_{os1} , 73MHZ below the lowest output frequency. Assuming for example that the range of desired output frequencies to be produced by synthesizer 100 is frequency $f_d = 8001\text{MHZ}$ to 8400MHZ . The offset frequency generator is selected to produce an output signal having an offset frequency $f_{os1} = 8001\text{MHZ} - 73\text{MHZ} = 7928\text{MHZ}$. Thus, if for example, the desired output signal is to have a frequency $f_d = 8210\text{MHZ}$ from Table II, $f_d = f_{os1} + 282\text{MHZ}$ and thus $M = 15$ and $N = 18$.

Referring now to Fig. 3 an indirect digital frequency synthesizer 200 is shown to include a pair of feedback loops, here phase-lock loops 202, 204 (PLL1, PLL2) adapted to produce an output signal having a

selected one of a plurality of frequencies within a band of frequencies with a predetermined frequency separation. Here the second phase-lock loop 204 is fed by a second reference frequency signal produced by a reference frequency generator 206. Here, the reference frequency generator 206 is equivalent to reference frequency generator 113 described above in connection with Fig. 2 and produces the first reference frequency signal with first reference frequency f_{R1} , here 8MHZ, and the second reference frequency signal with a frequency, f_{R2} , here 9MHZ, on lines 207 and 209, respectively. Also fed to the second phase-lock loop 204 is an offset frequency signal having frequency f'_{os1} produced by offset frequency signal generator 208. The second phase-lock loop 204 produces, in the steady state, an output signal on line 210 having a frequency $f'_{os2} = f'_{os1} \pm Nf_{R2}$. More particularly, the second phase-lock loop 204 produces an output signal on line 210 which is equal to the frequency of the offset frequency signal f'_{os1} translated in frequency, either up or down, an amount Nf_{R2} in a manner to be described. Suffice it to say here, however, that a portion of the output signal on line 210 is fed via directional coupler 212 to mixer 214. Also fed to the mixer 214 is the offset frequency signal produced by offset frequency signal generator 208. The beat frequency signal, generated by passing the signal produced by mixer 214 through low pass filter 216, is fed to programmable frequency divider 218. The programmable frequency divider 218 produces an output signal having a frequency equal to the frequency of the beat frequency signal divided by N, where N is an integer. Command signals representative of the integer N are produced by a decoder 220 in response to a digital word representative of the frequency to be synthesized, in a manner to be described. A phase/frequency detector 222 is fed by the second reference frequency signal on line 209 and the signal produced by the frequency divider 218 to produce a control signal which, after passing through switch 223, loop amplifier 224 and loop filter 226 serves to drive the voltage controlled oscillator (VCO) 228, so that, in the steady state, the frequency of the signal produced by the frequency divider 218 will be equal to the second reference frequency f_{R2} thus producing on line 210 an output signal having the frequency $f'_{os2} = f'_{os1} \pm Nf_{R2}$.

A portion of the output signal on line 210 is directly coupled, via directional coupler 212, to provide an offset frequency signal for the first phase-lock loop 202. Also fed to the first phase-lock loop 202 via line 207 is a first reference frequency signal produced by reference frequency generator 206 having a first reference frequency f_{R1} , here 8MHZ. The first phase-lock loop 202 produces, in the steady state, an output signal at port 230 having a frequency $f'_{os2} \pm Mf_{R1} = f'_{os1} \pm Nf_{R2} \pm Mf_{R1}$. More particularly, the first phase-lock loop 202 produces an output signal at port 230 having a frequency equal to the frequency of the offset frequency signal f'_{os2} fed thereto by the second phase-lock loop translated either up or down in frequency an amount Mf_{R1} in a manner to be described. Suffice it to say here, however, that a portion of the output signal at port 230 is fed, via directional coupler 232, to a mixer 234. A portion of the output signal produced by the second phase-lock loop on line 210 passes through directional coupler 212 to mixer 234. The beat frequency signal produced by passing the output of mixer 234 through low pass filter 238 is fed to a programmable frequency divider 240. The programmable frequency divider 240 produces an output signal having a frequency equal to the frequency of the beat frequency signal fed thereto divided by M, where M is an integer. The integer M is produced by decoder 220 in response to the digital word representative of the frequency to be synthesized in a manner to be described. A phase/frequency detector 242 is fed via line 207 by the first reference frequency signal and the signal produced by the frequency divider 240 to produce a control signal which, after passing through switch 244, loop amplifier 246, and loop filter 248 serves to drive voltage controlled oscillator (VCO) 250 so that, in the steady state, the frequency of the signal produced by the frequency divider 240 will be equal to the first reference frequency f_{R1} thus producing on line 230 an output signal having a frequency $f_d = f'_{os2} \pm Mf_{R1} = f'_{os1} \pm Nf_{R2} \pm Mf_{R1}$.

It is noted that here, instead of using an offset frequency f'_{os1} either above the upper or below the lower end of the band of frequencies producible by the second phase-lock loop 204, the offset frequency f'_{os1} provided by generator 208 is either at or near the center of such band of frequencies similar to that described in the copending patent application No. 89311439.7 referred to above. That is, the offset frequency f'_{os1} produced by generator 208 is at, or near, the center of the range of frequencies produced by VCO 228. Thus, considering first the second phase-lock loop 204, the beat frequency signal produced at the output of low pass filter 216 will have the same beat frequency whether the output signal of the VCO 228 is either $f'_{os1} + Nf_{R2}$ or $f'_{os1} - Nf_{R2}$. Thus, there is an ambiguity because every beat frequency corresponds to two VCO frequencies. This ambiguity is eliminated by the inclusion of a VCO frequency initialization circuit 260. In response to an input signal representative of the desired frequency to be synthesized, decoder 220 produces a signal on line B which causes the initialization circuit 262 to apply an appropriate voltage to the course-tuning port of VCO 228 or alternatively, to sum an appropriate voltage with the input (+ or -) of the loop amplifier 224. If the frequency f'_{os2} is to be below the offset frequency f'_{os1} , the frequency of the VCO 228 is positioned at some arbitrary frequency in the range between its lowest

output frequency and the offset frequency f'_{os1} . On the other hand, if the frequency f'_{os2} is to be above the offset frequency f'_{os1} , the VCO 228 output frequency is a frequency positioned at some arbitrary frequency in the range between the offset frequency f'_{os1} and the highest VCO 228 producible frequency. Following frequency initialization, the phase/frequency detector 222 acts as a discriminator and develops a control signal that slews the frequency of the VCO 228 from the initialization frequency to the capture range about the frequency f'_{os2} . The VCO initialization circuit 262 eliminates the above described frequency ambiguity because the frequency f'_{os2} and the initialization frequency are always on the same side of the offset frequency f'_{os1} .

Another factor to be considered because of the frequency ambiguity, (that is because the VCO 228 can produce two frequencies and generate the same beat frequency for the frequency divider 218) is that when the VCO 228 produces frequencies below the offset frequency f'_{os1} the beat frequency decreases as the VCO produced frequency increases whereas when the VCO 228 produces frequencies above the offset frequency f'_{os1} the beat frequency increases as the VCO 228 produces frequencies increase. Since the phase-lock loop 204 cannot be stable with both these relationships the sense (i.e. polarity) of the phase/frequency detector 222 must be changed, or switched, when the frequency f_{R2} is switched from one side of the offset frequency f'_{os1} to the other side to ensure that a negative feed-back (degenerative) loop condition exists. That is, if the loop is configured to exhibit negative feedback (stability) when the VCO frequencies are on one side of the offset frequency, then the loop exhibits positive feedback (instability) when VCO frequencies are on the other side of the offset frequency. Under the latter condition, negative feedback is restored by switching (interchanging) the two outputs of the phase/frequency detector which reverses the polarity of the output voltage of the loop amplifier (i.e. error voltage of the loop). This switching is accomplished by the use of switch 223. Switch 223 has a pair of input lines 252, 254 and a pair of output lines 256, 258. A control signal S_n produced by decoder 220, is fed to switch 223. The lines 256, 258 are fed to an inverting (-) input and a non-inverting (+) input, respectively, of loop amplifier 224. In response to one of two states of the control signal S_n , input line 252 is coupled to output line 256 and input line 254 is coupled to output line 258. In response to the second state of the control signal S_n , input line 252 is coupled to output line 258 and input line 254 is coupled to output line 256. This switching can also be accomplished by switching (i.e. interchanging) the two input signals to the phase/frequency detector 222 or by replacing the mixer 214 with an image rejection mixer followed by a switch as disclosed in the above-mentioned copending patent application where the two outputs of the image rejection mixer correspond to the two frequency ranges of the VCO 228 (below or above the offset frequency f'_{os1}).

For similar reasons, more specifically because VCO 250 of the first phase-lock loop 202 can produce two frequencies which produce the same beat frequency for divider 240, a switch 244, responsive to a control signal S_m from decoder 220 is provided to change the sense (i.e. polarity) of the control function provided by loop 202 and an initialization circuit 260 is also provided. The initialization circuit 260 here produces a voltage in response to a control signal produced by decoder 220 on line A which resolves the ambiguity. More particularly, if it is required to synthesize a frequency above the offset frequency f'_{os2} fed to loop 202 via line 210, a voltage is fed to VCO 250 which causes such VCO 250 to produce a signal of an arbitrary frequency above f'_{os2} whereas if it is required to synthesize the frequency below the offset frequency f'_{os2} being fed to loop 202, the voltage fed to VCO 250 causes the VCO 250 to produce an output signal having a frequency below f'_{os2} . Following initialization the phase/frequency detector 242 acts as a discriminator and develops an output voltage that slews the frequency of the signal produced by VCO 250 from the initialization frequency to the capture range about the frequency f_d .

In response to an input signal representative of the desired frequency to be synthesized, that is the frequency f_d , decoder 220 produces signals representative of the integers M and N, control signals S_n and S_m , and initialization control signals on lines A and B such that in the steady state, $f_d = f'_{os1} \pm f_T$ where $f_T = \pm Nf_{R2} \pm Mf_{R1}$.

The program stored in the decoder 220 (which here includes a read only memory), to generate the desired frequency f_d is provided in Table III below.

TABLE III

$$f_d = f'_{os1} \pm f_T = f'_{os1} + (\pm 9N \pm 8M)\text{MHZ}$$

	0	1	2	3	4	5	6	7	8	9
	M N	M N	M N	M N	M N	M N	M N	M N	M N	M N
$f'_{os1}-200$	-16 -8									
$f'_{os1}-190$	-8 -14	-7 -15	-15 -8	-14 -9	-13 -10	-12 -11	-11 -12	-10 -13	-9 -14	-8 -15
$f'_{os1}-180$	-9 -12	-8 -13	-7 -14	-15 -7	-14 -8	-13 -9	-12 -10	-11 -11	-10 -12	-9 -13
$f'_{os1}-170$	-10 -10	-9 -11	-8 -12	-7 -13	-6 -14	-14 -7	-13 -8	-12 -9	-11 -10	-10 -11
$f'_{os1}-160$	-11 -8	-10 -9	-9 -10	-8 -11	-7 -12	-6 -13	-14 -6	-13 -7	-12 -8	-11 -9
$f'_{os1}-150$	-12 -6	-11 -7	-10 -8	-9 -9	-8 -10	-7 -11	-6 -12	-5 -13	-13 -6	-12 -7
$f'_{os1}-140$	-4 -12	-12 -5	-11 -6	-10 -7	-9 -8	-8 -9	-7 -10	-6 -11	-5 -12	-13 -5
$f'_{os1}-130$	-5 -10	-4 -11	-12 -4	-11 -5	-10 -6	-9 -7	-8 -8	-7 -9	-6 -10	-5 -11
$f'_{os1}-120$	-6 -8	-5 -9	-4 -10	-3 -11	-11 -4	-10 -5	-9 -6	-8 -7	-7 -8	-6 -9
$f'_{os1}-110$	-7 -6	-6 -7	-5 -8	-4 -9	-3 -10	-11 -3	-10 -4	-9 -5	-8 -6	-7 -7
$f'_{os1}-100$	-8 -4	-7 -5	-6 -6	-5 -7	-4 -8	-3 -9	-2 -10	-1 -3	-9 -4	-8 -5
$f'_{os1}-90$	-9 -2	-8 -3	-7 -4	-6 -5	-5 -6	-4 -7	-3 -8	-2 -9	-1 -10	-9 -3
$f'_{os1}-80$	-1 -8	-3 -1	-8 -2	-7 -3	-6 -4	-5 -5	-4 -6	-3 -7	-2 -8	-1 -9
$f'_{os1}-70$	-2 -6	-1 -7	-9 -16	-8 -1	-7 -2	-6 -3	-5 -4	-4 -5	-3 -6	-2 -7
$f'_{os1}-60$	-3 -4	-2 -5	-1 -6	-9 1	1 -8	-7 -1	-6 -2	-5 -3	-4 -4	-3 -5
$f'_{os1}-50$	-4 -2	-3 -3	-2 -4	-1 -5	-9 2	1 -7	2 -8	-6 -1	-5 -2	-4 -3
$f'_{os1}-40$	4 -8	-4 -1	-3 -2	-2 -3	-1 -4	-9 3	1 -6	-7 1	3 -8	-5 -1
$f'_{os1}-30$	-6 2	-5 1	5 -8	-3 -1	-2 -2	-1 -3	-9 4	1 -5	2 -6	-6 1
$f'_{os1}-20$	2 -4	3 -5	5 -2	-4 1	6 -8	-2 -1	-1 -2	-9 5	1 -4	2 -5
$f'_{os1}-10$	1 -2	2 -3	3 -4	-5 3	-4 2	-3 1	7 -8	-1 -1	-9 6	1 -3
$f'_{os1}-0$	-9 8	1 -1	2 -2	3 -3	4 -4	-4 3	-3 2	-2 1	8 -8	-9 7
$f'_{os1}+0$	-9 8	-1 1	-2 2	-3 3	-4 4	-3 3	-2 2	-1 1	-8 8	9 -7
$f'_{os1}+10$	-1 2	-2 3	-3 4	5 -3	4 -2	3 -1	7 8	1 1	9 -6	-1 3
$f'_{os1}+20$	-2 4	-3 5	5 -2	4 -1	-6 8	2 1	1 2	9 -5	-1 4	-2 5
$f'_{os1}+30$	6 -2	5 -1	-5 8	3 1	2 2	1 3	9 -4	-1 5	-2 6	6 -1
$f'_{os1}+40$	4 8	4 1	3 2	2 3	1 4	9 -3	-1 6	7 -1	-3 8	5 1
$f'_{os1}+50$	4 2	3 3	2 4	1 5	9 -2	-1 7	-2 8	6 1	5 2	4 3
$f'_{os1}+60$	3 4	2 5	1 6	9 -1	-1 8	7 1	6 2	5 3	4 4	3 5
$f'_{os1}+70$	2 6	1 7	-9 16	8 1	7 2	6 3	5 4	4 5	3 6	2 7
$f'_{os1}+80$	1 8	9 1	8 2	7 3	6 4	5 5	4 6	3 7	2 8	1 9
$f'_{os1}+90$	9 2	8 3	7 4	6 5	5 6	4 7	3 8	2 9	10 2	9 3
$f'_{os1}+100$	8 4	7 5	6 6	5 7	4 8	3 9	2 10	10 3	9 4	8 5
$f'_{os1}+110$	7 6	6 7	5 8	4 9	3 10	11 3	10 4	9 5	8 6	7 7
$f'_{os1}+120$	6 8	5 9	4 10	3 11	11 4	10 5	9 6	8 7	7 8	6 9
$f'_{os1}+130$	5 10	4 11	12 4	11 5	10 6	9 7	8 8	7 9	6 10	5 11
$f'_{os1}+140$	4 12	12 5	11 6	10 7	9 8	8 9	7 10	6 11	5 12	13 5
$f'_{os1}+150$	12 6	11 7	10 8	9 9	8 10	7 11	6 12	5 13	13 6	12 7
$f'_{os1}+160$	11 8	10 9	9 10	8 11	7 12	6 13	14 6	13 7	12 8	11 9
$f'_{os1}+170$	10 10	9 11	8 12	7 13	6 14	14 7	13 8	12 9	11 10	10 11
$f'_{os1}+180$	9 12	8 13	7 14	15 7	14 8	13 9	12 10	11 11	10 12	9 13
$f'_{os1}+190$	8 14	7 15	15 8	14 9	13 10	12 11	11 12	10 13	9 14	8 15
$f'_{os1}+200$	16 8									

It is first noted that negative (-) division ratios of N, M correspond to frequencies produced by VCO 228, VCO 250, respectively, below the offset frequencies f'_{os1} , f'_{os2} , respectively, while all positive frequency division ratios N, M correspond to frequencies produced by VCO 228, VCO 250, respectively, above the offset frequencies f'_{os1} , f'_{os2} , respectively. Thus, for example, if the desired frequency f_d to be synthesized is $f'_{os1} + 64\text{MHZ}$, from Table III $M = -1$ and $N = 8$. Thus, the frequency of the signal produced by VCO 228 is above the offset frequency f'_{os1} but the frequency of the signal produced by VCO 250 is below the offset frequency f'_{os2} . Thus, as noted above, $f_d = f'_{os1} + 9N + 8M$. Here $M = -1$ and $N = 8$, thus $f_d = f'_{os1} + (9)(8) + 8(-1) = f'_{os1} + 64\text{MHZ}$. Whereas if $f_d = f'_{os1} - 64\text{MHZ}$, then, from Table III, $M = 1$ and $N = -8$. Further, if $f_d = f'_{os1} + 2\text{MHZ}$, $M = -2$ and $N = 2$; whereas if $f_d = f'_{os1} - 2\text{MHZ}$, $M = 2$ and $N = -2$. Finally, if $f_d = f'_{os1}$, then $M = -9$ and $N = 8$.

Having described preferred embodiments of this invention, it is evident that other embodiments incorporating these concepts may be used. For example, other reference frequency signals may be used.

Other frequency separations may be used. It is felt, therefore, that this invention should not be restricted to the disclosed embodiments, but rather should be limited only to the spirit and scope of the appended claims.

5

Claims

1. A frequency synthesizer for synthesizing a signal having a selected one of a plurality of frequencies within a band of frequencies, such plurality of frequencies having a predetermined frequency separation, comprising multiple interconnected feedback loops fed by reference frequency signals, the frequency of such reference frequency signals being greater than the predetermined frequency separation.
2. A frequency synthesizer for synthesizing a signal having a selected one of a plurality of frequencies within a band of frequencies with a predetermined frequency separation, comprising a pair of feedback control loops, each one thereof including means, fed by a reference frequency signal, for producing an output signal having a frequency equal to the frequency of an offset frequency signal fed to such loop translated in frequency an amount related to the selected frequency, the output signal of a second one of the loops providing the offset frequency signal for the first one of the loops, the output signal of the first one of the loops having the selected frequency, the frequency of both reference frequency signals fed to the feedback loops being greater than the predetermined frequency separation.
3. Apparatus for producing a signal having a selected one of a plurality of frequencies, each one of such plurality of frequencies being separated in frequency one from another an amount Δf , such apparatus comprising:
 - (a) reference frequency oscillator means for producing a pair of reference frequency signals having frequencies f_{R1} , f_{R2} , respectively, such frequencies being separated in frequency the amount Δf ;
 - (b) a second phase-lock loop having a frequency divider, such second phase-lock loop being fed by a second one of the produced reference frequency signals having the frequency f_{R2} and an offset reference frequency signal, for producing an output signal having a frequency equal to the offset frequency translated by an amount proportional to Nf_{R2} ;
 - (c) a first phase lock loop fed by the output of the second phase-lock loop and the first one of the pair of reference signals f_{R1} , for producing a signal translated in frequency an amount equal to the frequency of the output signal produced by the second phase-lock loop an amount proportional to Mf_{R1} ; and
 - (d) decoder, responsive to the selected frequency for producing the first and second control signals representative of M and N.
4. Apparatus for producing an output signal having a selected one of a plurality of frequencies, such plurality of frequencies being separated in frequency an amount Δf , such apparatus comprising:
 - (a) reference frequency producing means for producing a pair of reference frequency signals, a first one of the pair of produced reference frequency signals having a frequency f_{R1} and a second one of the pair of produced reference frequency signals having a frequency f_{R2} , the frequencies f_{R1} and f_{R2} being greater than the amount Δf ;
 - (b) a second feedback loop, fed by the second one of the pair of produced reference frequency signals, for producing an output signal having a frequency f_{os2} where f_{os2} is a function of an integer multiple of the frequency f_{R2} ;
 - (c) a first feedback loop, fed by the first one of the pair of produced reference frequency signals and the signal produced by the second feedback loop, having the frequency f_{os2} , for producing the apparatus output signal with the selected one of the plurality of frequencies, such first feedback loop produced signal being translated in frequency from the frequency f_{os2} an integer multiple of the frequency f_{R1} .
5. The apparatus recited in Claim 4 wherein frequencies f_{R1} and f_{R2} are separated by an amount related to the amount Δf .
6. The apparatus recited in Claim 5 wherein the frequencies f_{R1} and f_{R2} are separated by the amount Δf .
7. The apparatus recited in Claim 6 wherein the frequency f_{os2} is related to an integer multiple N of the frequency f_{R2} .
8. The apparatus recited in Claim 6 wherein the frequency produced by the apparatus is translated from the frequency f_{os2} an integer multiple M of the frequency f_{R1} .
9. The apparatus recited in Claim 7 wherein the second feedback loop is fed by an offset frequency signal of frequency f_{os1} and wherein the output signal produced by the second feedback loop has a frequency translated in frequency from f_{os1} an amount Nf_{R2} .
10. The apparatus recited in Claim 8 wherein the first feedback loop is fed by the output signal

produced by the second feedback loop and wherein the apparatus produced signal is translated in frequency from the frequency of the signal produced by the second feedback loop the amount of Mf_{R1} .

11. The apparatus recited in Claim 9 wherein the first and second feedback loops each includes a frequency divider for dividing by M and N.

5 12. Apparatus for producing a signal having a selected one of a plurality of frequencies, such frequencies being in a spectrum of frequencies over a predetermined bandwidth, the frequencies in such spectrum having a predetermined frequency separation Δf , such apparatus comprising:

(a) means for producing a pair of reference frequency signals separated in frequency by the predetermined frequency separation Δf , a first one of such pair of reference frequency signals having a frequency f_{R1} and a second one of the pair of reference frequency signals having a frequency f_{R2} , and wherein the frequencies f_{R1} and f_{R2} are greater than the predetermined frequency separations Δf ;

(b) means for producing a predetermined offset frequency signal, such signal having a frequency f_{os1} ;

(c) a second phase-lock loop for producing a second phase-lock loop output signal having a frequency f_{os2} equal to the frequency f_{os1} translated in frequency an amount Nf_{R2} such second phase-lock loop comprising:

(i) a second mixer, fed by the offset frequency producing means and the second phase-lock loop output signal, for producing a second mixer output signal having the frequency f_{T2} ;

(ii) a second frequency divider, responsive to a second control signal, such second control signal representing a second integer N and fed by the second mixer output signal, for producing a signal having a frequency f_N , where $f_N = f_{T2}/N$;

(iii) a second phase detector means, responsive to the signal produced by the second frequency divider and the second one of the pair of reference frequency signals, for maintaining, in a steady state condition, the frequency f_N equal to the second reference frequency f_{R2} to produce the second phase-lock loop output signal with the frequency f_{os2} equal to the frequency of the offset frequency f_{os1} translated an amount equal to f_{T2} ;

(d) a first phase-lock loop for producing the signal produced by the apparatus having a frequency f_d equal to the frequency f_{os2} translated in frequency an amount f_{T1} , such first phase-lock loop comprising:

(i) a first mixer fed by the signal produced by the second phase-lock loop having the frequency f_{os2} and by the signal produced by the apparatus;

(ii) a first frequency divider, responsive to a first control signal, such first control signal representing a first integer M and fed by the first mixer output signal, for producing a signal having a frequency f_M , where $f_M = f_{T1}/M$;

(iii) a first phase detector means, responsive to the signal produced by the first frequency divider and the first one of the pair of reference frequency signals, for maintaining, in a steady state condition, the frequency f_M equal to the first reference frequency f_{R1} to produce the apparatus output with the signal having the selected one of the plurality of frequencies; and


(d) decoder means, responsive to a signal representative of the selected one of the plurality of frequencies, for producing first and second control signals representative of the integers M and N.

40

45

50

55

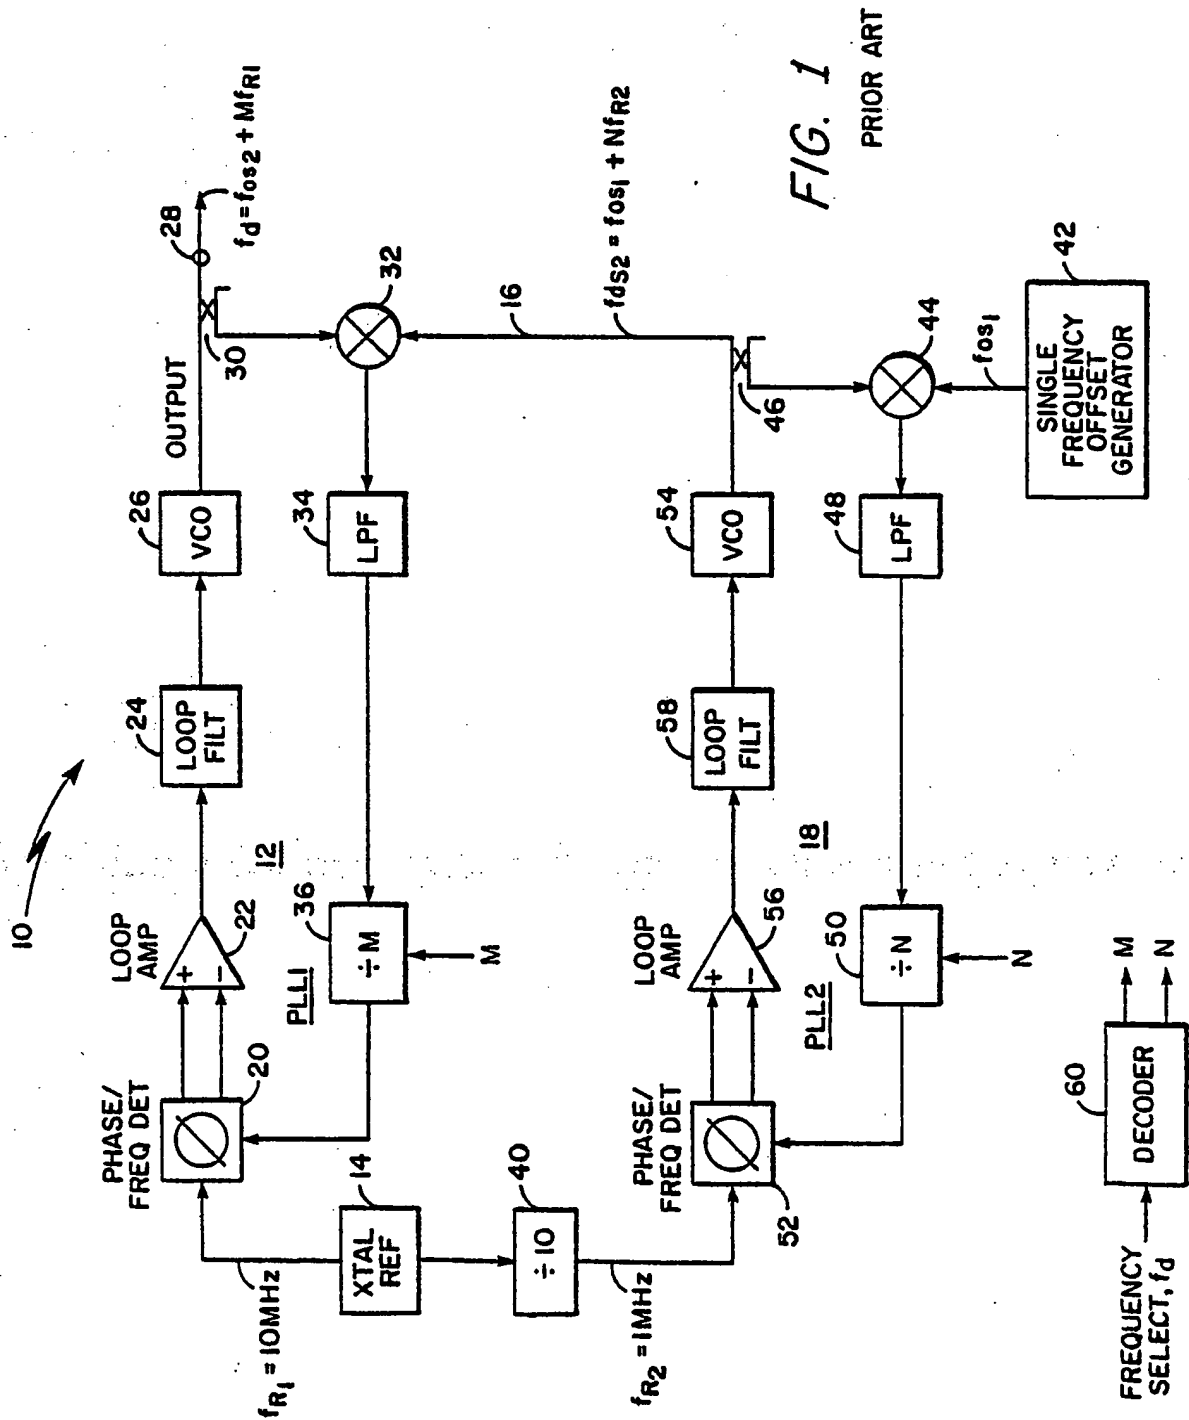


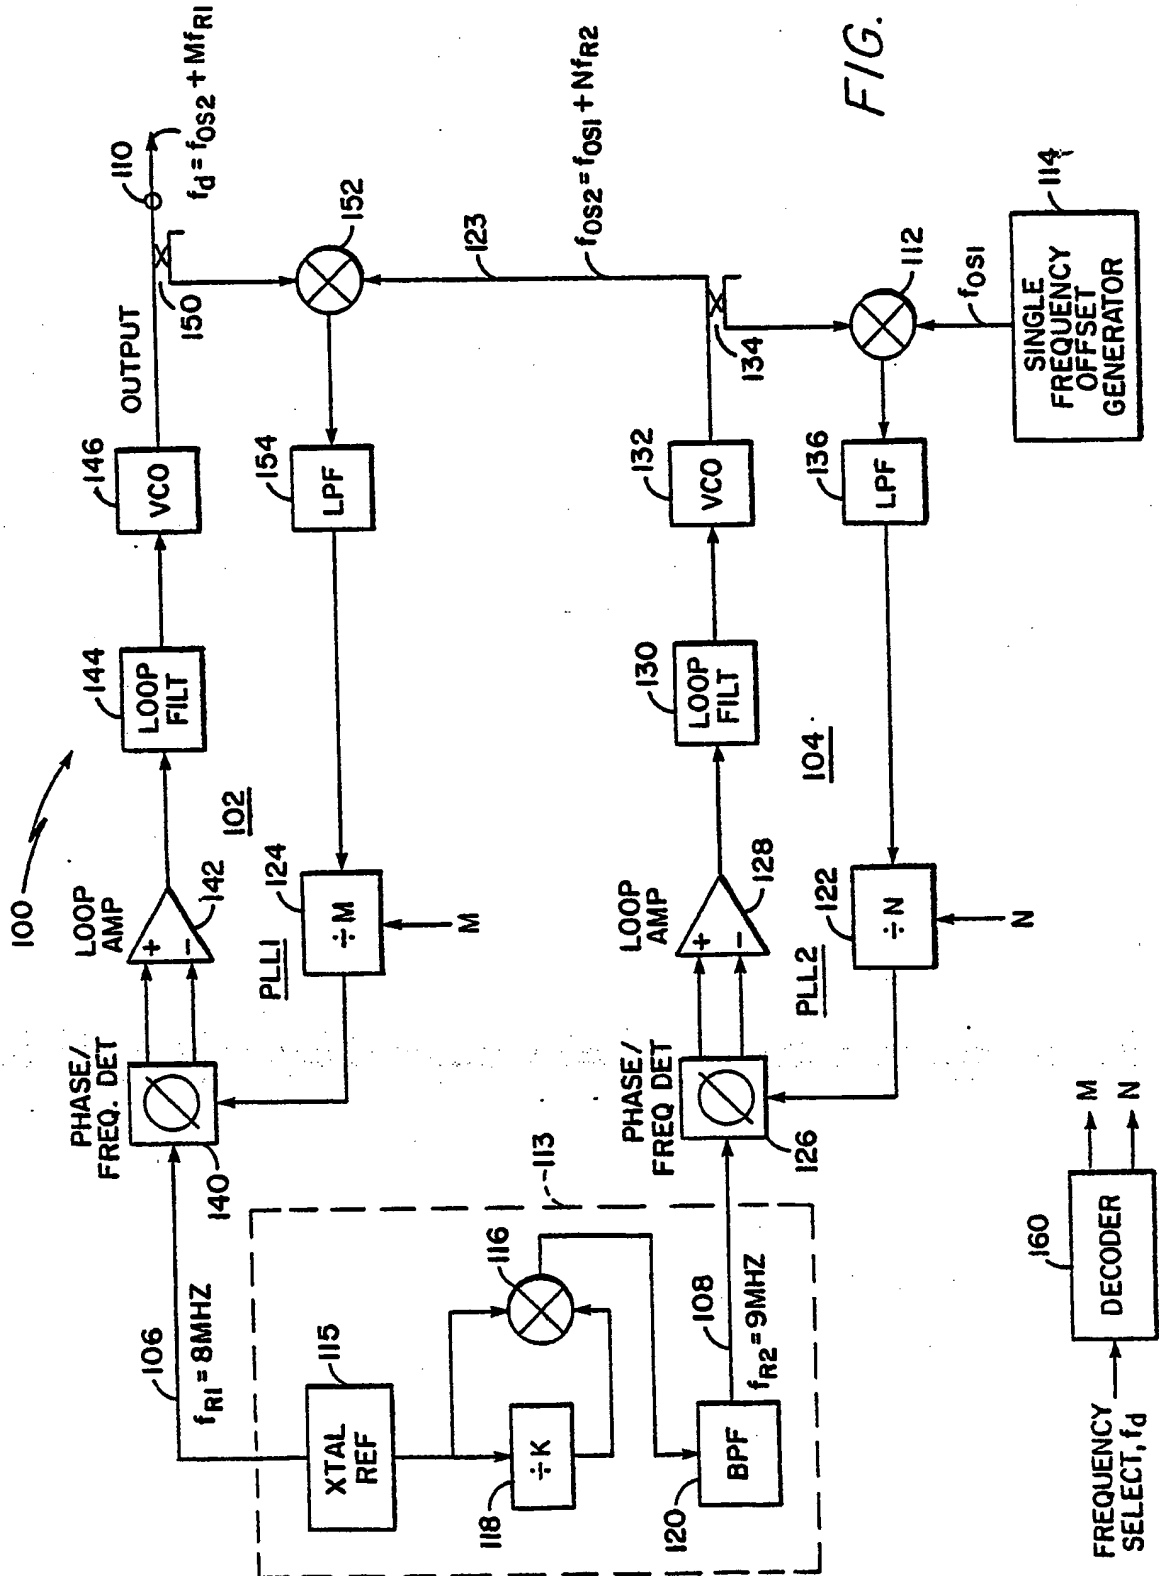


FIG. 2



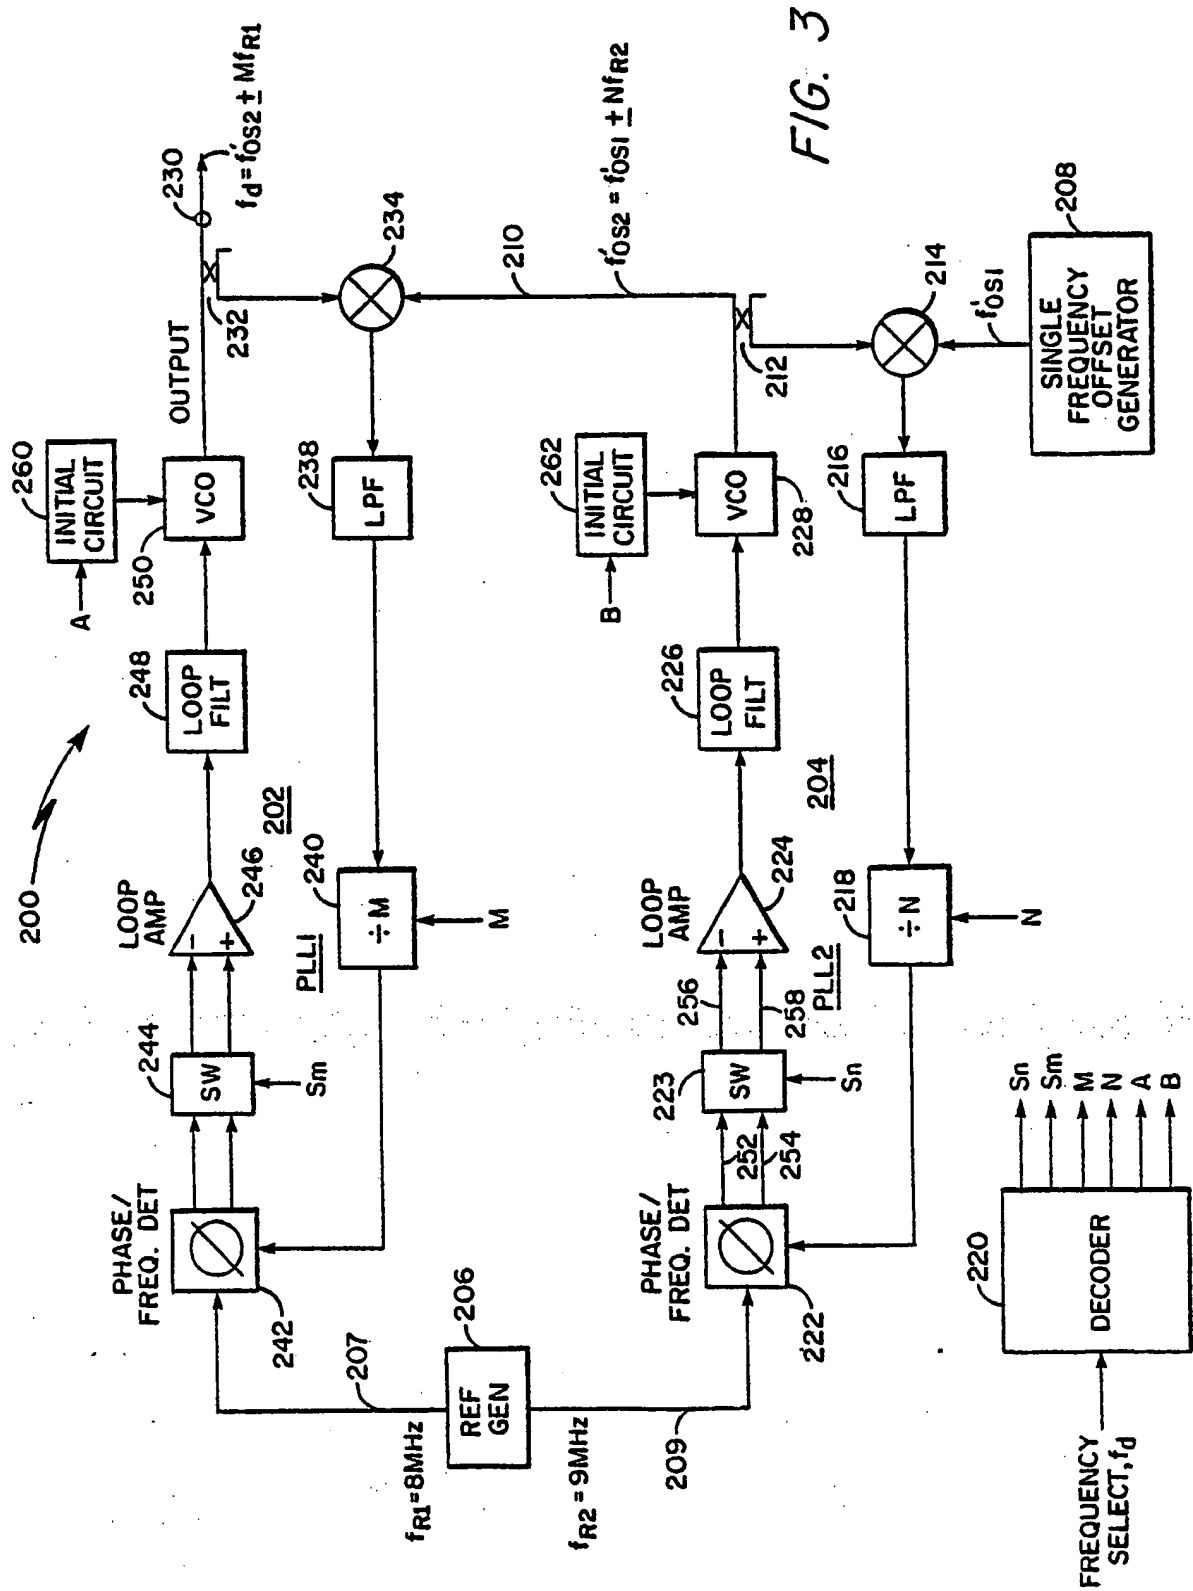

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 90 30 4088

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
X	US-A-3588732 (TOLLEFSON) * the whole document *	1-12	H03L7/22
X	US-A-3956703 (NOORDANUS ET AL.) * column 5, line 24 - column 7, line 22; figures 5, 6 *	1-12	
			TECHNICAL FIELDS SEARCHED (Int. Cl.5)
			H03L
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 21 AUGUST 1990	Examiner DHONDT I. E. E.
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			